




**Optical
Gaging
Products**



A Division of Quality
Vision International

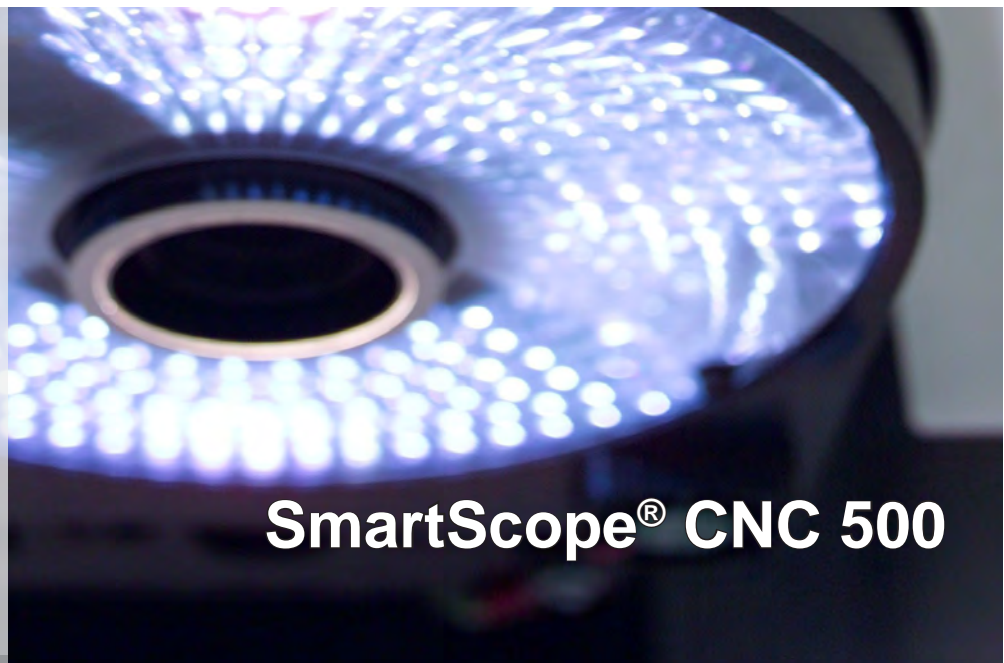

SmartScope® CNC 500

- *Measurement stability* – Optics mounted on a rigid bridge support structure for metrological integrity
- *Precision optics* – High quality Zoom 12 AccuCentric® zoom lens autocalibrates with every magnification change
- *Exclusive illumination to measure the most challenging parts* – Substage, TTL, and SmartRing™ light illuminate parts from all angles
- *Multisensor versatility* – Optional touch probe, laser, and micro-probe sensors


**Large Volume
Multisensor Dimensional
Measuring System**



Axis	Travel (mm)
X axis	500
Y axis	450
Z axis	200
Extended Y (opt)	610
Extended Z (opt)	300
Extended Z (opt)	400



SmartScope® CNC 500

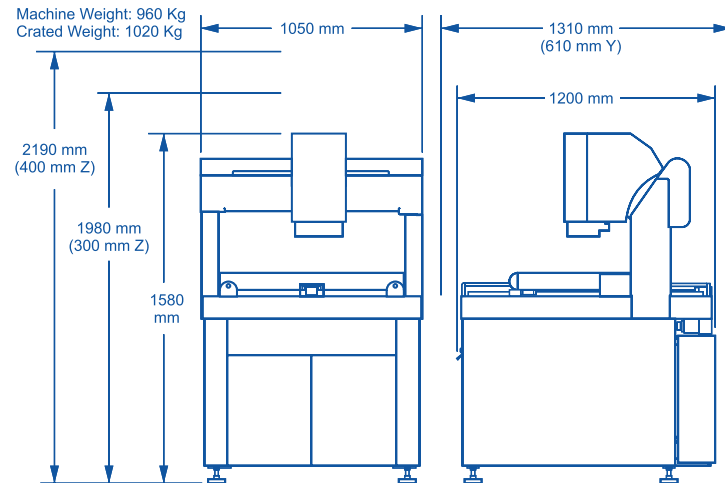

	Standard	Optional
XYZ travel	500 x 450 x 200 mm	Extended Y axis, 610 mm; extended Z axis, 300 or 400 mm
XYZ scale resolution	0.5 µm	0.1 µm (optional XYZ), optional dual Y-axis scales
Drive system	DC servo with 4-axis control (X,Y,Z,zoom); with joystick (for Measure-X®) or multifunction handheld controller (for MeasureMind® 3D)	
Worktable	Nickel plated steel, with fixture holes, removable stage glass, 65 kg recommended max payload	
Optics	Zoom 12 AccuCentric® auto-calibrating zoom with up to 25 calibrated positions	0.5x, 0.75x, 1.5x, and 2.0x lens attachments; 2.5x and 5.0x laser lenses (for use with or without optional TTL laser), LED grid projector; TTL laser adapter (includes laser pointer)
FOV size (std optical configuration)	Measured diagonally, 10.1 mm (low mag) to 1.1 mm (high mag)	
Illumination	LED substage (green), LED coaxial TTL surface, patented ¹ 8 sector/8 ring SmartRing™ LED (white)	
Camera	High resolution, color	
Image processing	256 level grayscale processing with 10:1 subpixel resolution	
Sensor options (contact OGP for possible combinations of sensors)		Touch probe and change rack, on-axis TTL laser, off-axis DRS™ laser, Feather Probe™, Rainbow Probe™ scanning white light sensor
Controller	Windows® based, with up-to-date processor and on board networking/communication ports	
Controller accessory package		24" flat panel LCD monitor, or dual 24" flat panel LCD monitors; keyboard, 3-button mouse (or user supplied)
Metrology software	Measure-X®	MeasureMind 3D MultiSensor®, Measure-X offline
Productivity software		MeasureFit® Plus, SmartReport® powered by QC-Calc, SmartFit® 3D, SmartProfile®, Scan-X®, TrueMap™, SmartScript®, SmartTree™
Power requirements	115/230 vac, 50/60 Hz, 1 phase, 700 W	
Rated environment	Temperature 18-22° C, stable to ±1° C; 30-80% humidity; vibration <0.001g below 15 Hz	
Operating environment, safe operation	15-30° C	
XYZ volumetric accuracy¹		$E_3 = (3.5 + 8L/1000) \mu\text{m}^{2.45}$ (requires QVI 3D metrology software ¹)
XY area accuracy¹	$E_2 = (2.5 + 5L/1000) \mu\text{m}^{2.34}$	
Z linear accuracy¹	$E_1 = (3.0 + 8L/1000) \mu\text{m}^4$	$E_1 = (2.0 + 8L/1000) \mu\text{m}^4$ (with optional 2.0x replacement lens and grid projector, TTL laser, or TP20 or 200 touch probe)

¹Patent Number 5,690,417

²Where L = measuring length in mm. Applies to thermally stable system in rated environment. Maximum rate of temperature change: 1° C/hour. Maximum vertical temperature gradient: 1° C/meter. All optical accuracy specifications at maximum zoom lens setting. Volumetric accuracy performance requires use of QVI 3D metrology software, such as MeasureMind 3D or CSP.

³With evenly distributed load up to 10 kg. Depending on load distribution, accuracy at maximum rated load may be less than standard accuracy.

⁴Measured in the standard measuring plane. The standard measuring plane is defined as a plane that is within 25 mm of the worktable surface.

⁵E₁, Z axis linear, E₂, XY area, and E₃, XYZ volumetric accuracy standards are described in QVI Publication Number 790762. ⁶On-site verification optional.



World Headquarters: Rochester, NY, USA • 585.544.0400 • www.ogpnet.com
 OGP Shanghai Co, Ltd: Shanghai, China • 86.21.5045.8383/8989 • www.smartscope.com.cn
 OGP Messtechnik GmbH: Hofheim-Wallau, Germany • 49.6122.9968.0 • www.ogpmesstechnik.de
 Optical Gaging (S) Pte Ltd: Singapore • 65.6741.8880 • www.smartscope.com.sg

